

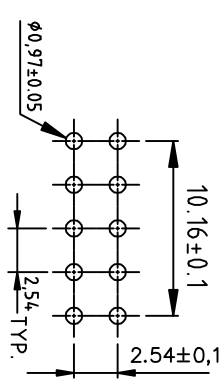
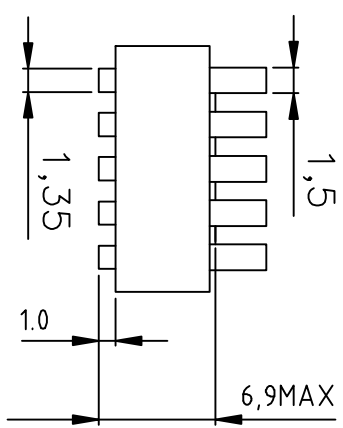


PRODUCT NO.	ROHS compliant
DSDA05LH8ET	

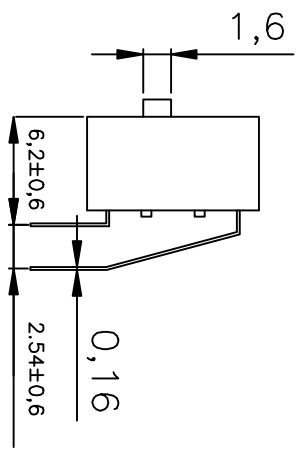

P.C.B. LAYOUT

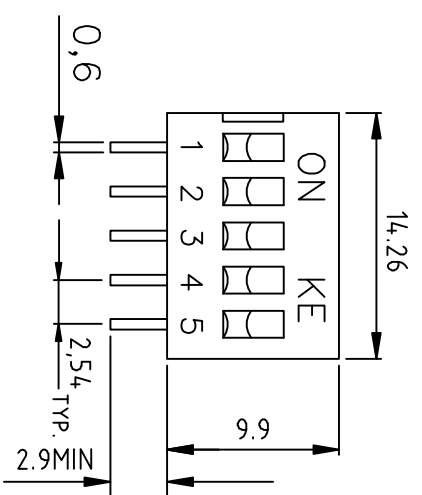

- Note:
- All dimensions are in millimeters.
  - General tolerance:  $\pm 0.2\text{mm}$ .
  - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
  - Electrical: 2000 Operations per switch 24/VDC, 25mA.
  - Non-Switching Rating: 100mA, 50/VDC.
  - Switching Rating: 25mA, 24/VDC
  - Contact Resistance: 100 mΩ Max. at initial.

- Mechanical
  - Mechanical life: 2000 Operations per switch.
  - Stroke: 2.0mm.
  - Operation Temp: -20°C to 70°C.
  - Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DA XX L H G E T

- [Packing: T=Tube R=Reel]
- [Finish: G=Full Gold S=Contact Gold-plated Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe I=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	OUT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		
DESIGN	LDI BR TIN	2013/07/08	
QUALIFY			
CHECK			
APPROV			

<b>东莞市广誉实业有限公司</b> Dongguan Kingtek Industrial Co., Ltd.			
TITLE			
BY DSDA SERIES PITCH 2.54mm			
PRODUCT FAMILY	DSDA SERIES		
PART NO.	DSDA05LH8ET		
FILE NO.	DSDA05LH8ET-1		
SIZE	UNIT	SCALE	SHEET
A4	mm	1:1	1 OF 1